


Ultrasonic distance and proximity sensors UPK Series

- Measuring distances from 80mm up to >5m
- High detection sensitivity
- Very low profile, small size
- Versions with analogue and/or binary output
- Versions with synchronisation input
- Measurement independent of material, surface, colour and size of target
- Work under dust, dirt, fog, light
- Detect transparent and bright objects
- Protection class IP 67, fully watertight, robust
- M8 connector for screw or snap-on
- Versions with shielded integrated cable
- Customized versions available!
- Swiss made

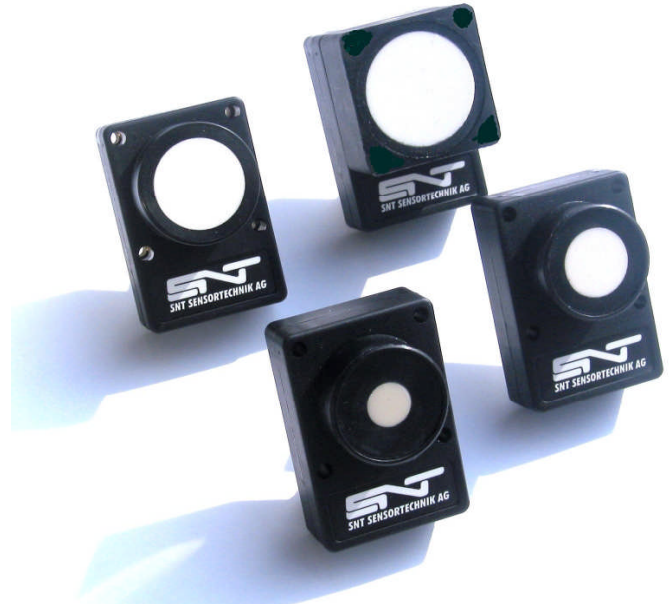

Technical specifications

		UPK 500	UPK 1000	UPK 2500	UPK 5000
Detection range nominal, with standard versions	mm	80...500	135...1000	250...2500	400...5000
Detection range POR-Version for bigger objects	mm	80...~800	135...~1500	250...>3000	400...>6500
Blind range (no reasonable analogue signal)	mm	0...80	0...135	0...250	0...400
Adjustment range of binary output (with potentiometer)	mm	80...500	135...1000	250...2500	400...5000
Hysteresis of binary output, axial, @ FS _{nom.}	mm	~15	~25	~40	~80
Resolution	%FS	~0.2%	~0.1%	~0.1%	~0.1%
Linearity	%FS		<±0.5%		
Temperature error -20...+50°C	%		<1		
Over all accuracy in whole temperature range	%FS		~±1		
Operating frequency	kHz	~180	~180	~120	~80
Status indicator	-		LED red/green		
Binary output, short circuit proof, max. 0.1A	-		by choice PNP, NPN, NO, NC		
Switching speed max.	Hz	~8	~5	~3	~2
t _{on} / t _{off} (binary output @ 50%FS, wo. background)	ms	~50 / 80	~130 / 90	~200 / 120	~700 / 140
Analogue output in detection range (Versions)			(0)...10 bzw. (10)...0V		
R _L min. 10kΩ with V output	V		(4)...20mA bzw. (20)...4mA		
R _L max. 400Ω with mA output	mA				
Ripple of analogue output @ FS _{nom.}	mV	~±60	~±20	~±15	~±20
Tracking speed of analogue output	s/95%FS	0.06	0.25	0.4	<2
Power supply voltage (reversal polarity protection)	VDC		15...30		
Ripple of supply voltage	%		<10		
Mean consumption, switched wo. load	mA	~60	~60	~60	~65
Peak current, switched wo. load	mA	~85/0.1ms	~85/0.1ms	~95/0.2ms	~100/0.3ms
Temperature coefficient of air path	%/°K		-0.17 (increasing temperature → output decreases)		
Ambient temperature during operation	°C		-20...+50		
Sensor temperature during operation	°C		-20...+70		
Pressure range	mbar _{abs}		~900...1100		

Technical specifications (continued)

		UPK 500	UPK 1000	UPK 2500	UPK 5000
Mass wo. cable	g	~90	~90	~90	~105
Protection class	-			IP67	
Housing material	-			Polyamide glass-fibre reinforced	
Electrical connection	-			M8 connector 4-pin or integrated cable	

High power density

The outstanding feature of the UPK series is its high acoustic power combined with small sensor size. This is achieved with new optimized **SONARANGE** transducers, working at high electrical voltages. Thus also small, moving and poorly reflecting objects can be safely detected. Moreover the sensors work also under high contamination. With a length of <40mm the UPK sensors are the most compact ultrasonic sensors for such high measuring ranges.

AGC (Automatic Gain Control)

AGC is exclusively used in the UPK series. It adjusts automatically the detection sensitivity to the reflected signal intensity, allowing the detection of very small objects, too.

Temperature compensation

The temperature coefficients of the electronics and the transducer as well are compensated thanks to a special circuit.

Choice of model

The UPK versions differ particularly by their different measuring ranges. Besides the following versions are available for each measuring range:

- Fixed analogue output and 1 adjustable binary output
- 2 individually adjustable binary outputs
- Analogue output with adjustable zero and FS

The analogue outputs are available with 0...10V or 4...20mA and furthermore with inverted analogue outputs 10...0V or 20...4mA. Other versions available on demand.

Binary outputs

Binary outputs become active, i.e. they switch on or off, when a scanned object falls below the set distance or if it exceeds it. Each switch point has a hysteresis (see technical specifications). This is the difference between switch on and switch off point during approach or departure. Hysteresis is necessary for an appropriate switching behaviour.

Synchronisation input (Y versions)

The ultrasonic signals can disturb each other when several sensors are focused on the same target or when sensors are mounted close together. This can be avoided by synchronizing the sending pulses. The synchronisation leads if all sensors are connected to each other by shielded cables as short as possible. Since all sensors send then simultaneously, the current consumption increases heavily. Not used synchronisation leads shall be isolated.

Blind range

The lower detection range is called blind range. It is typical for ultrasonic sensors. In the blind range no distance measurement is possible! However the pure function as proximity switch (binary output) is possible in the blind range with certain restrictions (only bigger objects).

Inclination angle of object

Smooth surfaces can be detected up to an inclination angle of 10°. However rough and structured (granular) surfaces can be detected up to much higher angles.

Cable

All standard versions have a 4-pin M8 connector for screw or snap-on connection. The Y-versions with synchronisation input have a shielded integrated cable (l=2m). Special cable lengths and integrated cables instead of connector are available on demand. The cable should be kept as short as possible. Maximum cable length is approx. 100m, if cross section area is appropriate (peak current <100mA!, use 470µF/35V backup capacitor close to sensor). The cable should not be mounted parallel or close to high current cables.

Cables for connection to the M8 connector have to be ordered separately.

Mounting

The UPK sensors have 4 M4 threaded holes on their rear side of the housing. They can be mounted with 2.4 M4 screws. 4 screws M4x20 are scope of delivery. Optionally a mounting bracket Type UPM made of glass fibre reinforced plastic can be ordered.

Power supply


Ideally a power supply is used exclusively for the sensor. The power supply must be able to supply the short peak current of 80...100mA for each sensor. In order to avoid disturbances the part where the sensor is mounted must be correctly earthed.

Detection beams

The detection beam of an ultrasonic sensor has the shape of a cone. The size depends on the target and its sound reflecting characteristics. Small and more badly reflecting objects result in a smaller cone (narrower and shorter). Bigger objects and those with surfaces which are not perpendicular to the central axis can expand the cone. The

exact cone shape and size can be determined only at the object itself. No disturbing objects must be between the sensor and the target within the cone. Otherwise the sensor would detect the disturbing object instead of the desired target. Below typical cone shapes are shown for each sensor type. The solid line shows the range, where the sensor detects flat objects of size A4 (UPK 500/1000) or A3 (UPK 2500/5000) which are perpendicular to the sensor axis. In the dotted range the sensor UPK 500/1000 detects round objects ($\varnothing 10\text{mm}$). For UPK 2500/5000 the dotted range is the area where the sensor detects only large and very well reflecting objects. Furthermore the size of the detection beam is influenced by air temperature and humidity. The colder and dryer the air, the larger is the beam. **The extended measuring range (above nominal range) is only available with the POR versions!**

No other ultrasonic sensor working at the same frequency shall be within the cone or close to it or opposite to it. This is only allowed when using the synchronisation option (Y-versions).

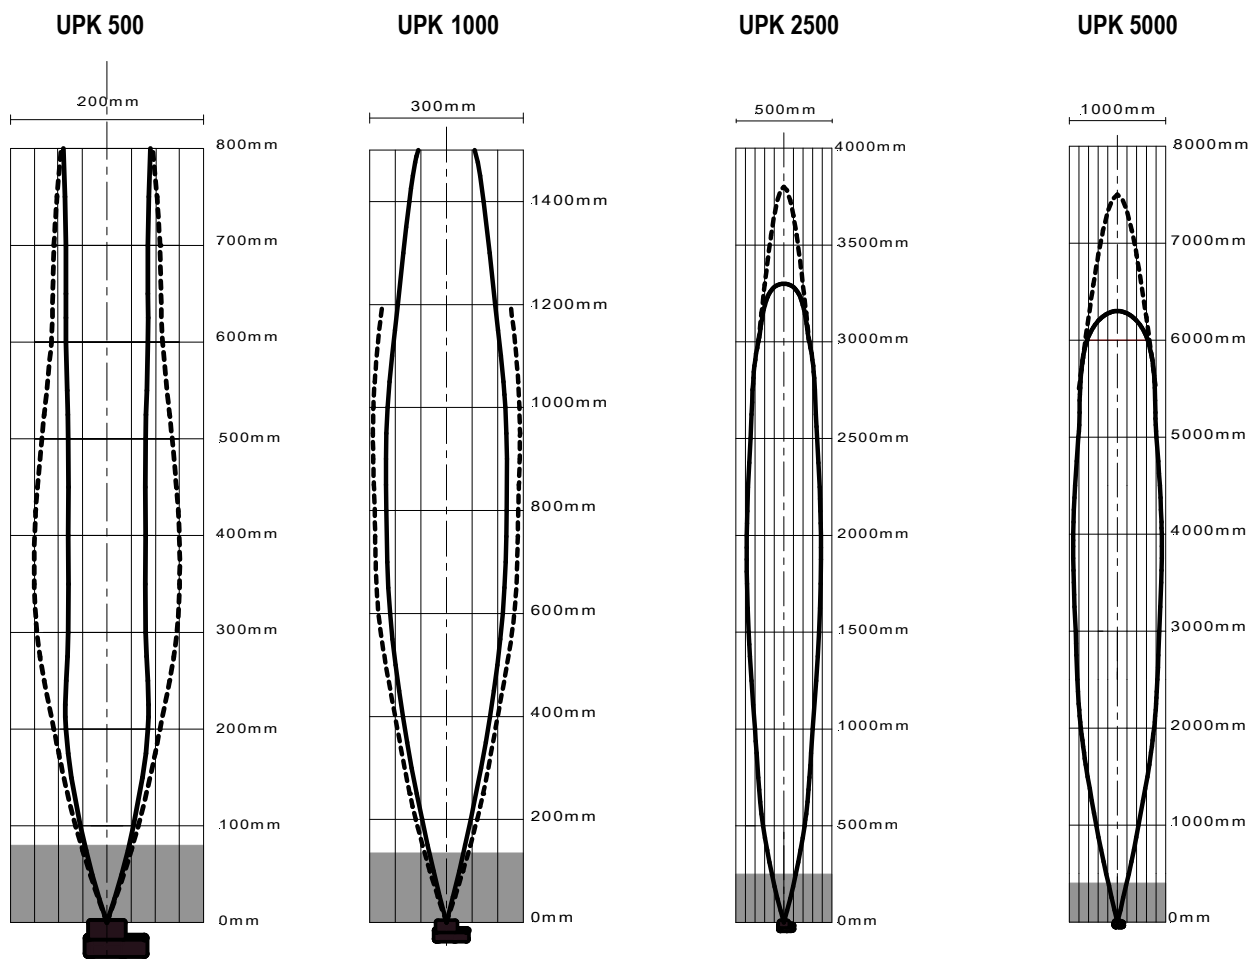

Settings

Binary outputs:

The switching distance is set with a 4-turn potentiometer. An object with reasonable size and perpendicularly to the sensor axis is placed at the desired distance from the sensor. First the potentiometer is turned min. 4x counter clockwise to zero (no stop). Then the potentiometer is slowly turned clockwise until the LED illuminates (NO) or expires (NO). Thus the switching distance for the binary output is set. Red corresponds to the output 1 and green to the output 2. The versions with two binary outputs have a bi-colour LED (red/green).

Adjustable analogue outputs:

Zero and full scale (FS) of the analogue outputs can be set on the POR versions with two 4-turn potentiometers. The analogue output has to be monitored with a multi-meter.

Zero (= limit close to the sensor):

Zero (e.g. 0V) is at the position of the sensor diaphragm when potentiometer No. 1 is turned at least 4x counter clockwise (no stop). If zero shall be in some distance from the sensor, one has to place there an object with reasonable size. The potentiometer is turned min. 4x clockwise (no stop). The reading must then be e.g. 0V or a very small residual value (approx. 0.04V). Then one turns slowly counter

clockwise until the reading starts to increase. This is then the correct setting for the zero.


Full scale (FS, = farlimit):

An object with reasonable size is placed at the desired distance. With potentiometer No. 2 the desired reading (e.g. 10V) is then set.


The zero can be varied approx. from 0 to 50% of the nominal detection range and the full scale approx. from 20% to 150%. However in the range >100% the sensor will detect only bigger objects and above a certain distance no objects at all. FS must always be above zero. If the analogue output shall be inverted, i.e. zero above FS, then the inverted version 'V' must be used.

Type	Zero 0V or 4mA		Full scale (FS) 10V or 20mA	
	Min. [mm]	Max. [mm]	Min. [mm]	Max. (theoretical) [mm]
UPK 500	0	300	100	800
UPK 1000	0	500	200	1500
UPK 2500	0	1500	500	3800
UPK 5000	0	3000	1000	8000


Use the miniature screw driver which is scope of delivery for adjustment of the potentiometers!

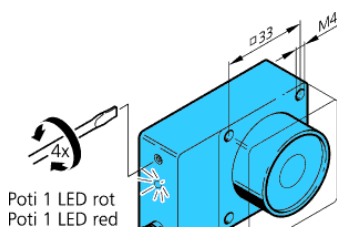

Poti 1 LED rot
Poti 1 LED red

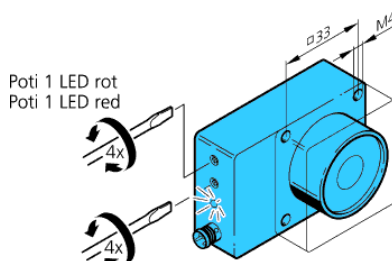

Poti 2 LED grün
Poti 2 LED green

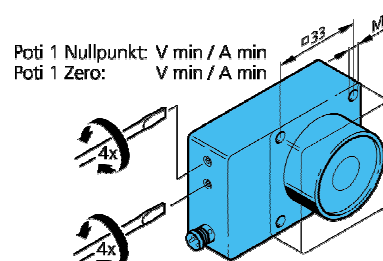

Poti 2 Endpunkt: V max / A max
Poti 2 Full scale: V max / A max

Type

UPK xxxx PVPS 24 CA
UPK xxxx PVPS 24 CI
UPK xxxx PVPS 24 CVA
UPK xxxx PVPS 24 CVI

UPK xxxx PDPS 24 C
UPK xxxx PDPA 24 C

UPK xxxx POR 24 CAI
UPK xxxx POR 24 CVAI

Outputs

1 binary output, 1 analogue output

2 binary outputs

2 analogue outputs (V und mA)


Setting elements

1 potentiometer, 1 LED

2 potentiometers, 1 bi-colour LED

2 potentiometers, no LED

Dimensions

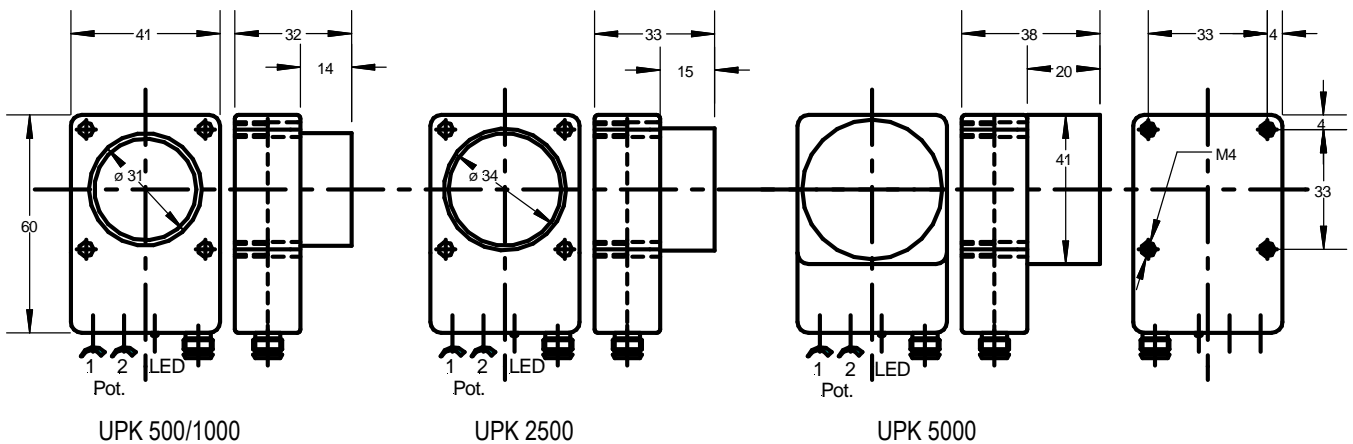


Standard versions

1 analogue output + 1 binary output		Schema
UPK XXXX PVPS 24 CA	1 binary output, PNP NO, 1 analogue output 0...10V, 4-pin connector, 1 pot., 1 LED	A
UPK XXXX PVPS 24 CI	1 binary output, PNP NO, 1 analogue output 4...20mA, 4-pin connector, 1 pot., 1 LED	A
UPK XXXX PVPS 24 CVA	1 binary output, PNP NO, 1 analogue output 10...0V, 4-pin connector, 1 pot., 1 LED	A
UPK XXXX PVPS 24 CVI	1 binary output, PNP NO, 1 analogue output 20...4mA, 4-pin connector, 1 pot., 1 LED	A
2 binary outputs		
UPK XXXX PDPS 24 C	2 binary outputs, PNP NO, 4-pin connector, 2 pot., 1 bi-colour LED	B
UPK XXXX PDPA 24 C	1 binary output, PNP NO, 1 binary output, PNP NC, 4-pin connector, 2 pot., 1 bi-colour LED	B
2 analogue outputs		
UPK XXXX POR 24 CAI	1 analogue output 0...10V, 1 analogue output 4...20mA, zero and FS adjustable, 4-pin connector, 2 pot., no LED	C
UPK XXXX POR 24 CVAI	1 analogue output 10...0V, 1 analogue output 20...4mA, zero and FS adjustable, 4-pin connector, 2 pot., no LED	C
Option synchronisation input		
All versions UPK Y	additionally synchronisation input, integrated shielded cable 2m	D

Basically nearly all possible versions are available according to the following product key.


Nominal detection range: XXXX: 500 = 500mm, XXXX: 1000 = 1000mm, XXXX: 2500 = 2500mm, XXXX: 5000 = 5000mm

UPK XXXX P □ □ □ 24 □ □ □ □

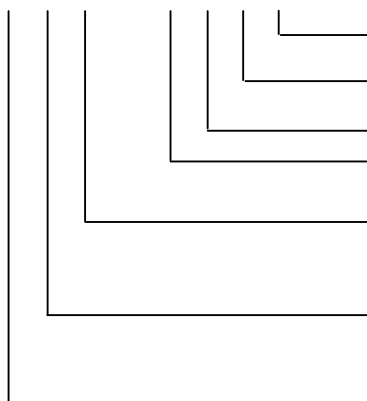

Synchronisation input	Y
Analogue output 10V	A
Analogue output 20mA	I
Inverted analogue output	V
M8 connector (else cable)	C
Binary output NO	S
Binary output NC	O
Binary outputs NO+NC	A
Binary output PNP	P
Binary output NPN	N
Analogue output with adjustable FS	R
1 Binary output	V
2 Binary outputs	D
Analogue output with adjustable zero	O


Diagrams of connections

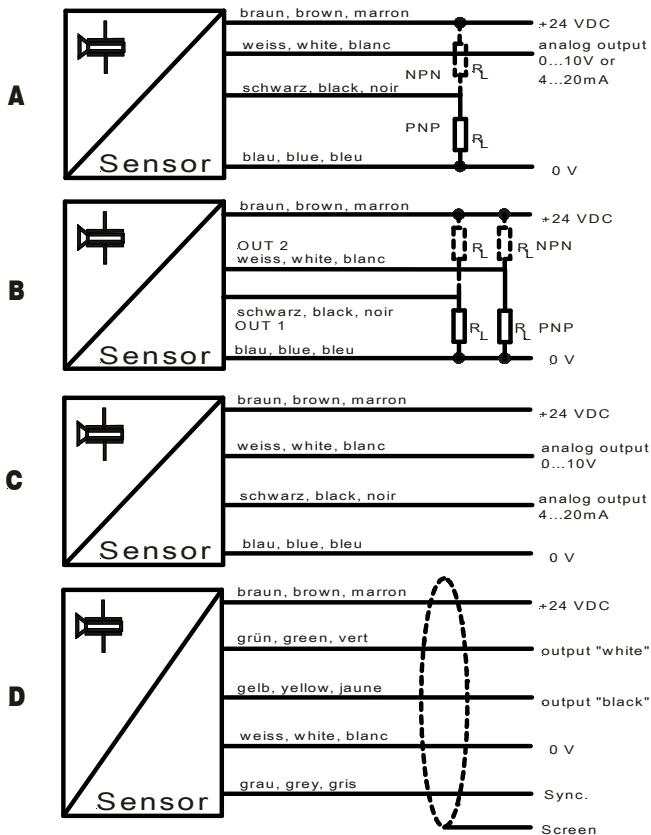

All versions with integrated cable instead of connector have cable colours according to scheme "D".

4-pin connector

- | | |
|---------|---------|
| 1 brown | 3 blue |
| 2 white | 4 black |



View on the sensor

Scope of delivery

- Sensor
- 4 screws M4x20mm for mounting
- Miniature screw driver for potentiometer

Some typical ultrasound applications

Level measurement

- Measuring level in small containers
- Water gauge measurement
- Monitoring liquid levels in bottling plants
- Checking for tailbacks on conveyor belts
- Monitoring contents of granulate hoppers on injection moulding machines
- Distance monitoring on combine harvesters, beet lifters etc.
- Monitoring ground clearance and distance on agriculture and construction vehicles

Process control

- Controlling belt tension or sag
- Sensing and signalling valve positions
- Measuring roll diameter on reeling machines
- Monitoring the height of stacks (charges, storehouse, assembling machines)
- Detecting material feed
- Detecting the feed of strip stock to blanking machines and presses
- Detecting on plastic blow-moulding machines

Counting / Detection

- Counting onlookers at freestanding sales displays or show cases
- Access supervision at rotating doors, counters etc.
- Door automation
- Detecting transparent objects, foils, flat glass, bottles etc.
- Sensing objects in robot grippers
- Recognizing full or empty pallets
- Count and detect objects with 'difficult' surface
- Detect wrong parts on conveyors
- Collision protection on vehicles

Scanning of dimensions

- Determining the dimensions of packages
- Sensing the height of plants in automated green houses
- Measuring the volume of tree-trunks

Accessories (see also data sheet ,ACC')

Cables 4-pin with M8 screw connector, PUR:

- | | | |
|--------------------------|------|-------------------|
| With straight connector: | l=2m | Type KAB 2K4VGPUR |
| | l=5m | Type KAB 5K4VGPUR |
| with 90° connector: | l=2m | Type KAB 2K4VWPUR |
| | l=5m | Type KAB 5K4VWPUR |

Mounting bracket made of reinforced polyamide:

Type UPM